



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.WR28292f

Between Series – 2.9mm to WR28

Frequency	Insertion Loss	Impedance	VSWR	Power
26.5 - 40GHz	0.39dB max	50 Ω	1.25:1 max	10W CW

Notes:

- Material:**
 Body: brass/gold plated
 Contacts: BeCu/gold
 Dielectric: PTFE
- Operation temperature:** -30°C to +85°C

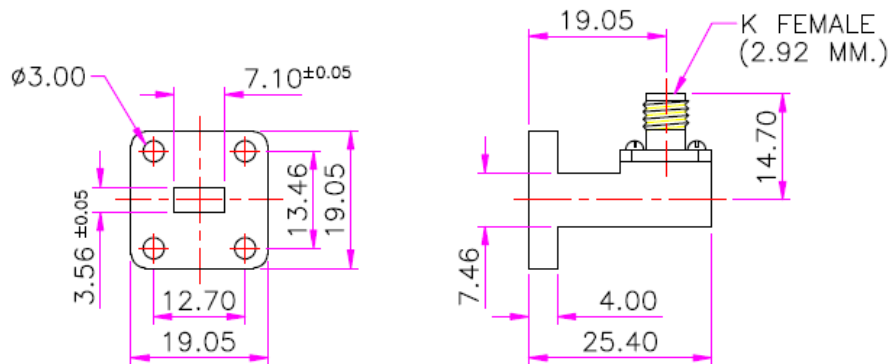

Dimensions in mm. All specifications are subject to change without notice.