



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.WRG229Nf

Between Series – N to WR229

Frequency	Insertion Loss	Impedance	VSWR	Power
3.3–4.9GHz	0.20dB max	50 Ω	1.10:1 max	100W CW

Notes:

- Material:
Body: Aluminum/golden iridite
Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -40°C to +85°C
- Gasket not supplied
- Flange is CPR-229G

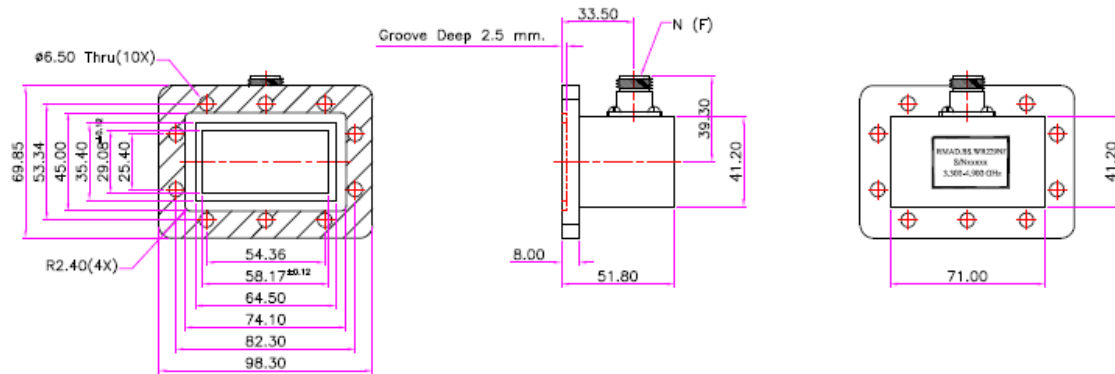

Dimensions in mm. All specifications are subject to change without notice.