



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.BS.X10Nff

Between Series – Nex10 to N male/female

Frequency	Insertion Loss	Impedance	VSWR	PIM
DC – 8GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.25:1 max	-160dBc

Notes:

- Material:**
Body: brass/ternary alloy
Contacts: BeCu/silver
Dielectric: PTFE
- Operation temperature:** -40°C to +155°C
- RoHS Compliant**
- Interface IAW Nex10 & IEC 61169-16**

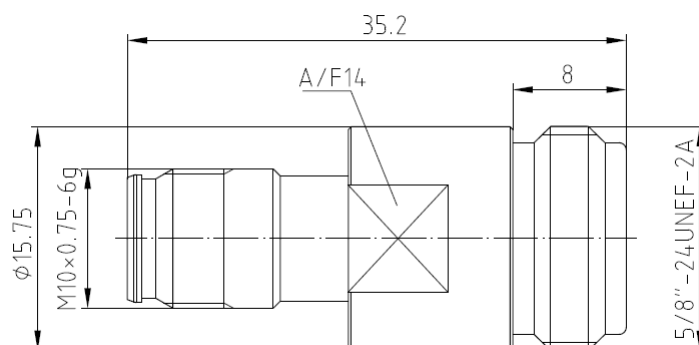

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com