



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In Series


Model RMAD.IS.10mf

1.0mm to 1.0mm male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 110GHz	0.6dB max	50Ω	1.28 :1 max

Notes:

- Material:**
Body: SUS303 stainless steel/passivate
Center Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature:** -55°C to +125°C
- Mating torque;** 1.0mm =0.45Nm

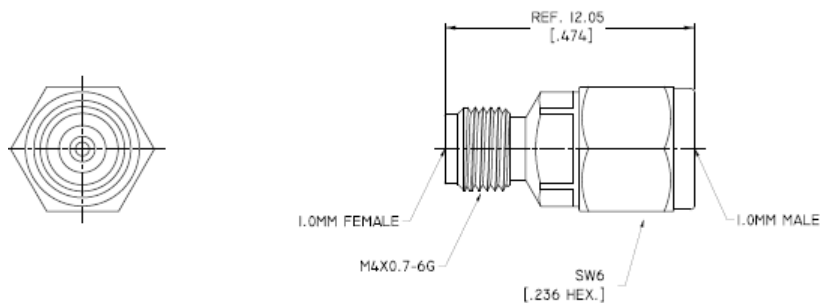

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com