



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In Series


Model RMAD.IS.10mm

1.0mm to 1.0mm male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 110GHz	0.6dB max	50Ω	1.28 :1 max

Notes:

- a. Material:
 - Body: SUS303 stainless steel/passivate
 - Center Contacts: BeCu/gold
 - Dielectric: PEI
- b. Operation temperature: -55°C to +125°C
- c. Mating torque; 1.0mm =0.45Nm

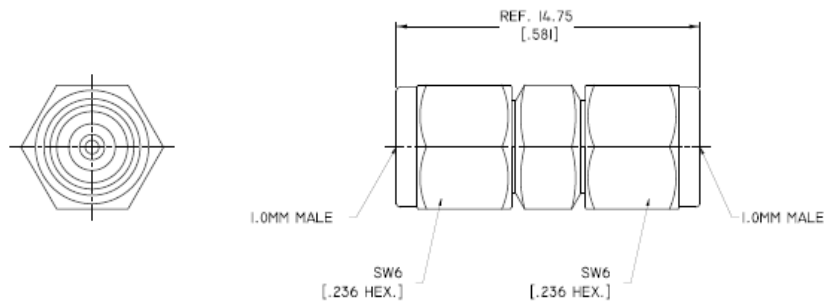

Dimensions are in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com