



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In-Series


Model RMAD.IS.24ff4HF

2.4mm female/female 4-hole Flange

Frequency	Insertion Loss	Impedance	VSWR
DC – 50GHz	$0.07 f^{\frac{1}{2}}$ dB <i>f=frequency GHz</i>	50Ω	1.20:1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65°C to +105°C

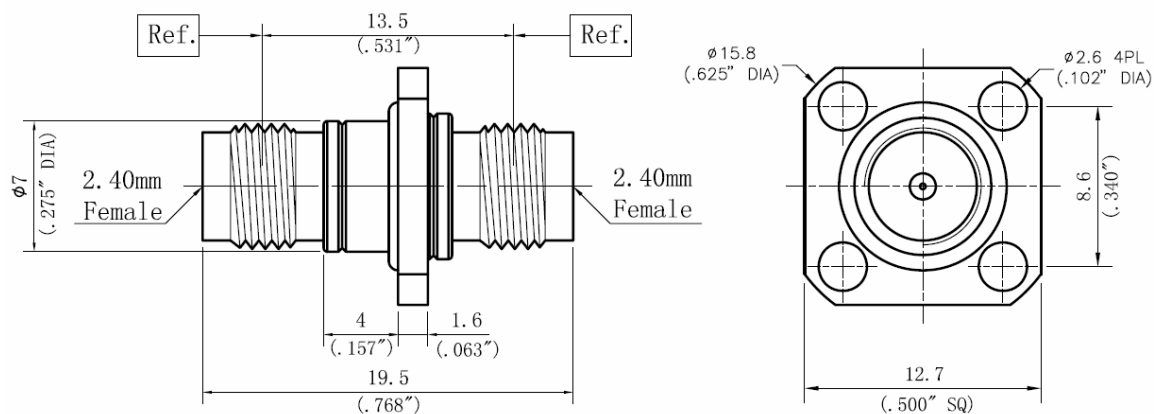

Dimensions in millimeters. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com