



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.IS.24mf

In Series – 2.4mm male/female

| Frequency  | Insertion Loss                                                   | Impedance | VSWR        |
|------------|------------------------------------------------------------------|-----------|-------------|
| DC – 50GHz | 0.07 f <sup>1</sup> / <sub>2</sub> dB<br><i>f</i> =frequency GHz | 50Ω       | 1.20 :1 max |

### Notes:

- a. Material:  
 Body: SUS303 stainless steel/passivate  
 Socket Contacts: BeCu/gold  
 Dielectric: PEI
- b. Operation temperature: -65°C to +105°C

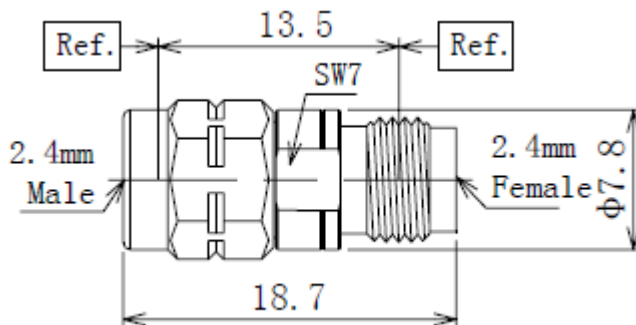

Dimensions in millimeters. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)