



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.IS.292ff

In Series – 2.92mm female/female

| Frequency  | Insertion Loss                        | Impedance | VSWR        |
|------------|---------------------------------------|-----------|-------------|
| DC – 40GHz | 0.07 f ½ dB<br><i>f=frequency GHz</i> | 50Ω       | 1.20 :1 max |

### Notes:

- Material:  
Body: SUS303 stainless steel/passivate  
Socket Contacts: BeCu/gold  
Dielectric: PEI
- Gold plating per MIL-G-45204, TYPE I, Grade C, Class 1  
and interfaces are compliant to MIL-STD-348
- Operation temperature: -65°C to +105°C

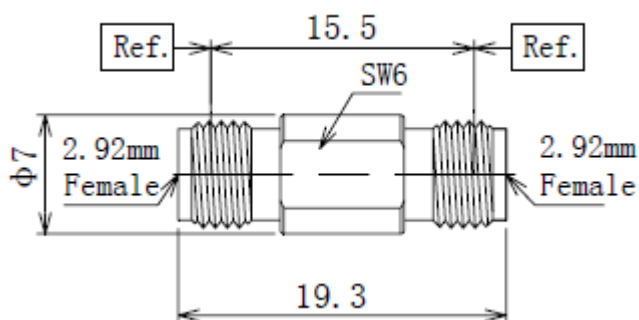

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)