



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In Series


Model RMAD.IS.292ffBHb

2.92mm female/female w/hex


Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ½ dB <i>f=frequency GHz</i>	50Ω	1.20:1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -55°C to +100°C
- Mating torque -8-10lbs

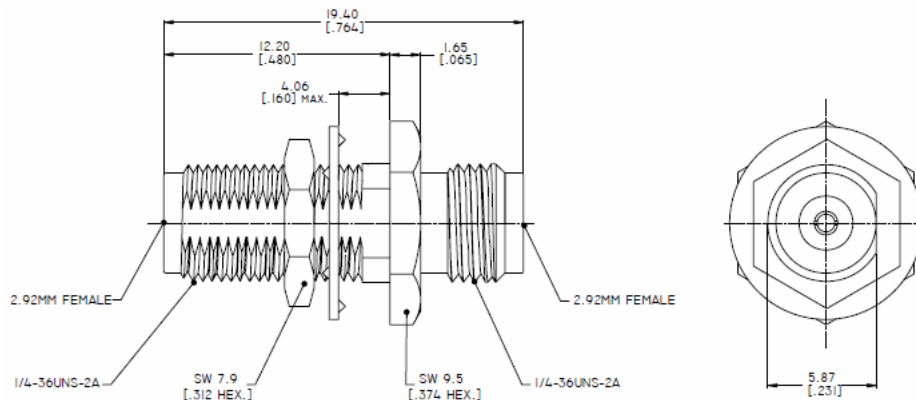

Mounting Pattern



Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com