



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

ADAPTORS


Model RMAD.IS.292mf

In Series – 2.92mm male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.20 :1 max

Notes:

- a. Material:
 - Body: SUS303 stainless steel/passivate
 - Socket Contacts: BeCu/gold
 - Dielectric: PEI/ULTEM1000
 - Gasket: silicon
- b. Operation temperature: -65°C to +105°C

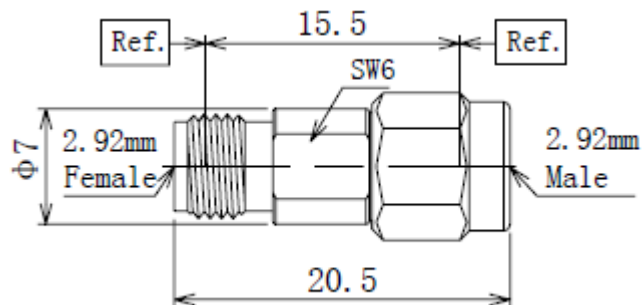

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com