94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.IS.292mfBH In Series – 2.92mm male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ½ dB *f=frequency GHz*	50Ω	1.15 :1 max

Notes:

a. **Material:**
   - **Body: stainless steel/passivate**
   - **Socket Contacts: BeCu/gold**
   - **Dielectric: PEI**

b. **Operation temperature: -65°C to +105°C**

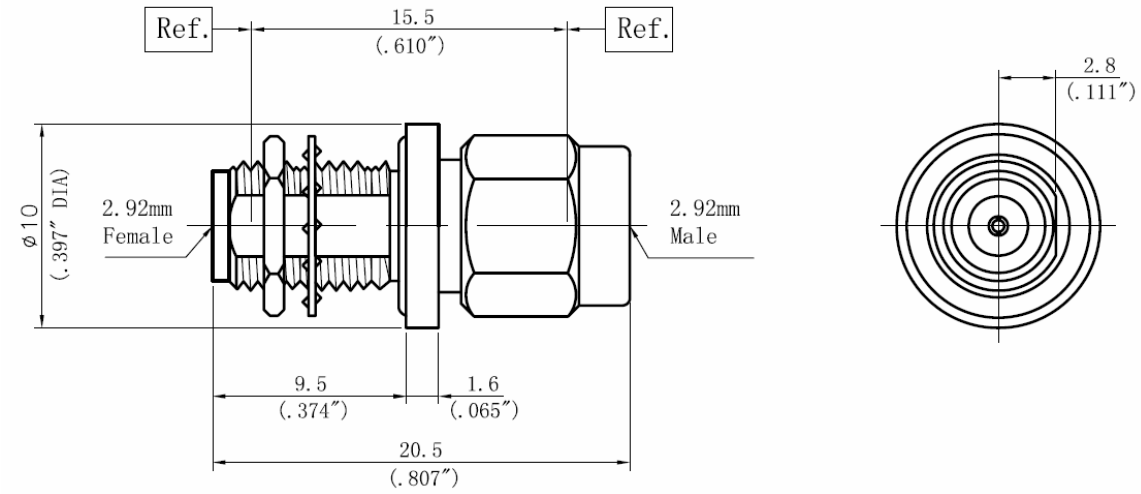

Dimensions in mm (inches). All specifications subject to change

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com