



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.292mm

In Series – 2.92mm male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.20 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Gold plating per MIL-G-45204, TYPE I, Grade C, Class 1
and interfaces are compliant to MIL-STD-348
- Operation temperature: -65°C to +105°C

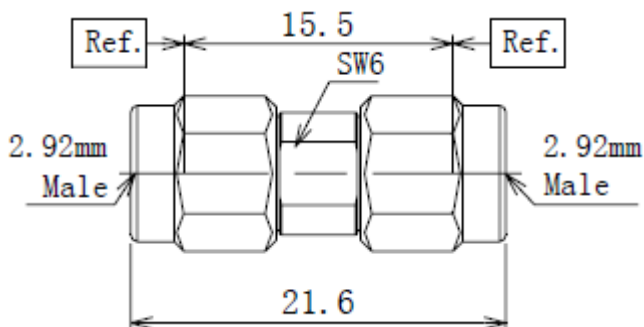

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com