



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.35ff

In Series –3.5mm female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 33GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50ohms	1.15 :1 max

Notes:

- Material:
Body: SU303F stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65C to +105C deg

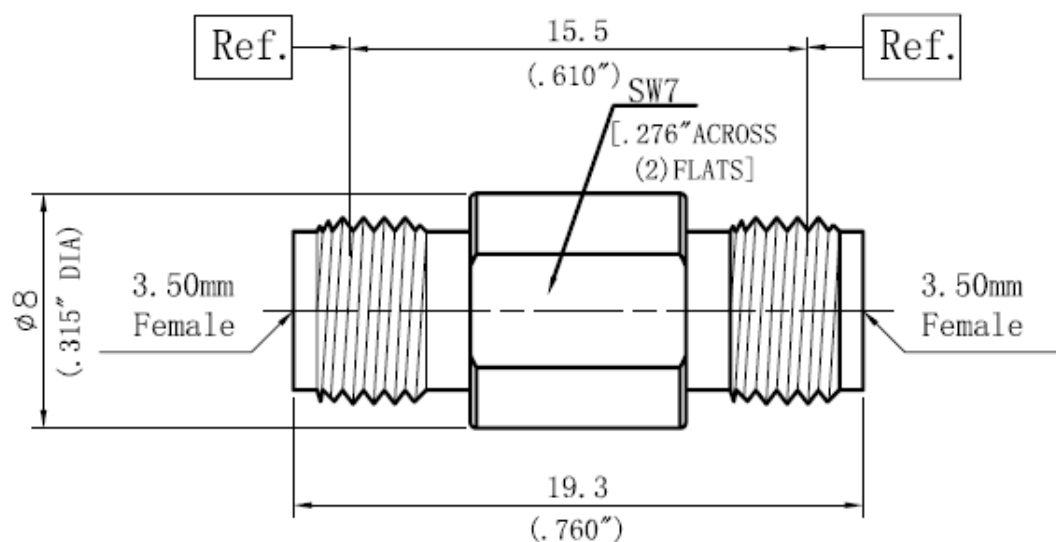

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com