



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.35mfRA

In Series – 3.5mm male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 33GHz	$0.05\sqrt{\text{frequency GHz}}$	50 Ω	1.25 :1 max

Notes:

- a. Material:
 - Body: SU303F stainless steel/passivate
 - Contacts: BeCu/gold
 - Dielectric: PEI
- b. Operation temperature: -65°C to +105°C

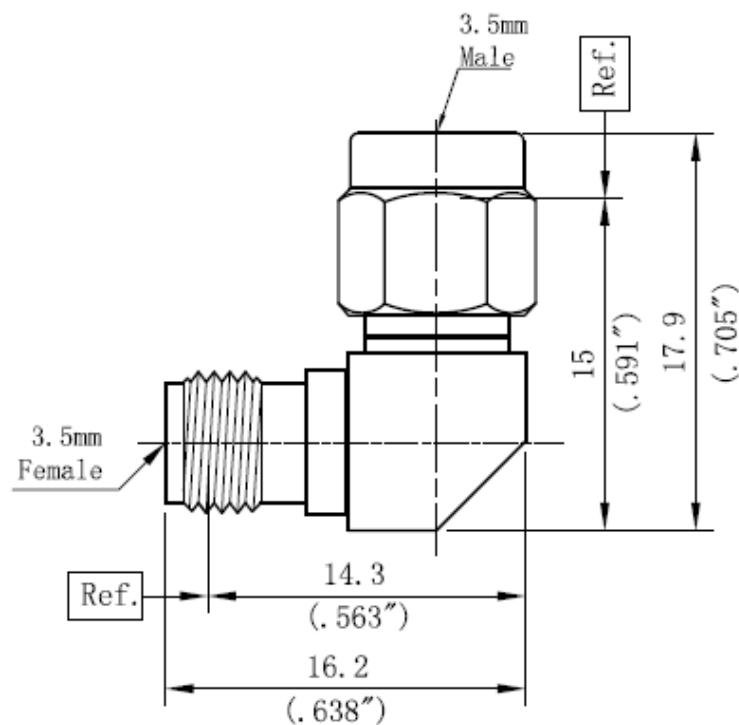

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com