



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.716mm

In Series – 7/16 male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.4dB min	50Ω	1.20:1 max

Notes:

- Material:
Body: brass/ternary alloy
Contacts: brass/gold
- Operation temperature: -65°C to +105°C
- Interface: per MIL-C-39012 & IEC169-15

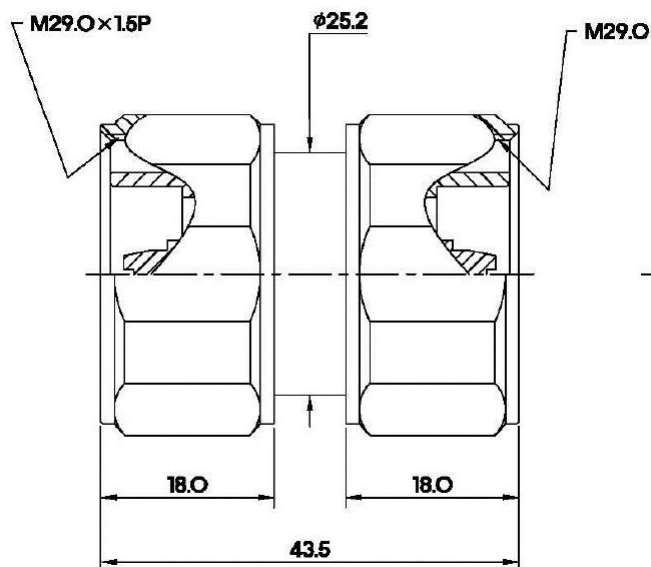

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com