



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

ADAPTORS


Model RMAD.IS.BNCff

In Series – BNC female to BNC female

Frequency	Insertion Loss	Impedance	VSWR
DC – 3GHz	0.5dB max	50 Ω	1.25:1 max

Notes:

- a. **Material:**
 Body: brass/nickel
 Socket Contacts: BeCu/gold
 Dielectric: silicon
- b. **Operation temperature:** -65°C to +85°C

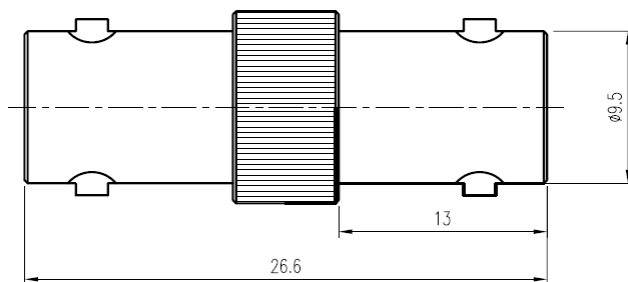

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com