



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.BNCffBH

In Series – BNC female to BNC female

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	$0.09 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.25:1 max


Notes:

- a. **Material:**
 Body: brass/nickel
 Socket Contacts: BeCu/gold
 Dielectric: Teflon
 O-ring: Silicon
- b. **Operation temperature:** -65°C to +85°C

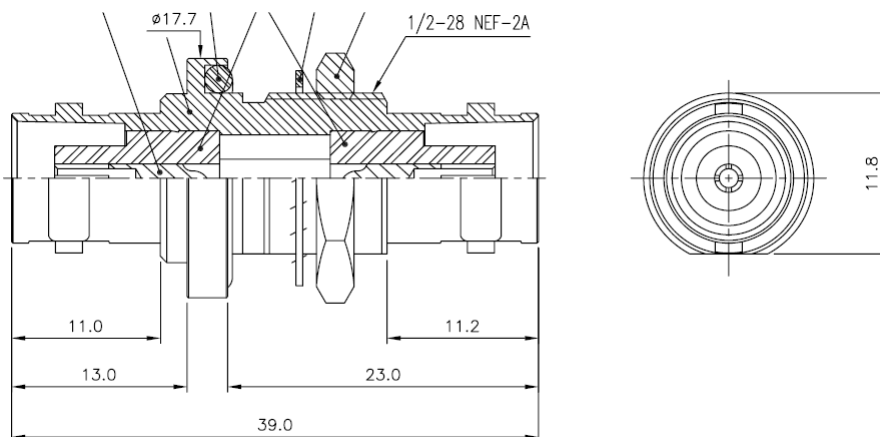

Dimensions in mm. All specifications subject to change

SUGGESTED PANEL CUT-OUT



Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com