



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.BNCmfBH

In Series – BNC male to BNC female

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.09 f ¹ / ₂ dB <i>f</i> =frequency GHz	50Ω	1.25:1 max


Notes:

- a. Material:
 Body: brass/nickel
 Center Contacts: BeCu/gold
 Dielectric: Teflon
 O-ring: Silicon
- b. Operation temperature: -65°C to +85°C

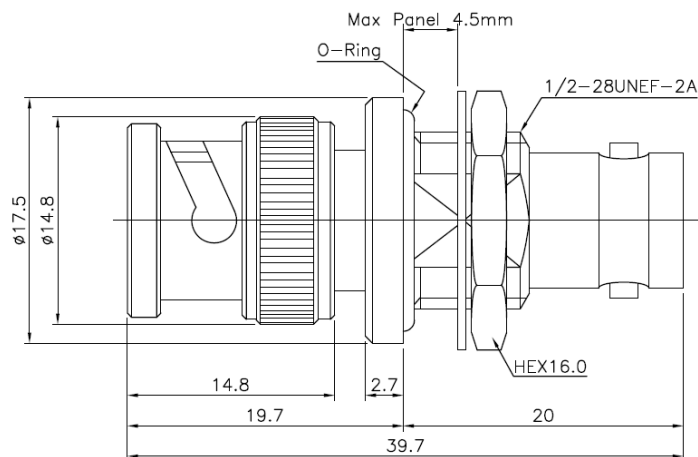

Dimensions in mm. All specifications subject to change

SUGGESTED PANEL CUT-OUT



Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com