



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.BNCmm

In Series – BNC male to BNC male

Frequency	Insertion Loss	Impedance	VSWR
DC – 3GHz	$0.07 f^{1/2}$ dB <i>f</i> =frequency GHz	50Ω	1.25:1 max

Notes:

- a. Material:
Body: brass/silver
Socket Contacts: BeCu/gold
Dielectric: teflon
- b. Operation temperature: -65°C to +85°C

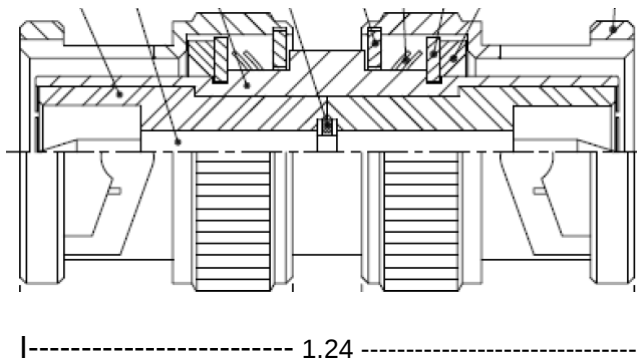

Dimensions in inches. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com