



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS

In Series


Model RMAD.IS.Fff75

F female to Female

Frequency	Insertion Loss	Impedance	Dielectric Withstanding
DC – 1GHz	0.2dB	75 Ω	>1000V RMS

Notes:

- a. **Material:**
 Body: brass/nickel
 Contacts: Brass/tin
 Dielectric: POM
- b. **Operation temperature:** -40°C to +85°C

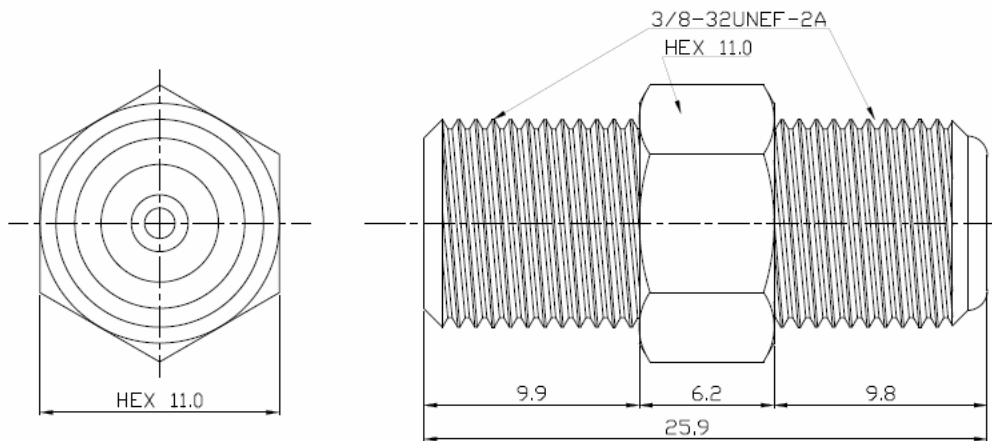

Dimensions in mm. All specifications are subject to change without notice.