



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.MCXff

In Series – MCX female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.20:1 max

Notes:

- a. Material:
 - Body: brass/gold
 - Socket Contacts: BeCu/gold
 - Dielectric: PEI
- b. Operation temperature: -65°C to +85°C

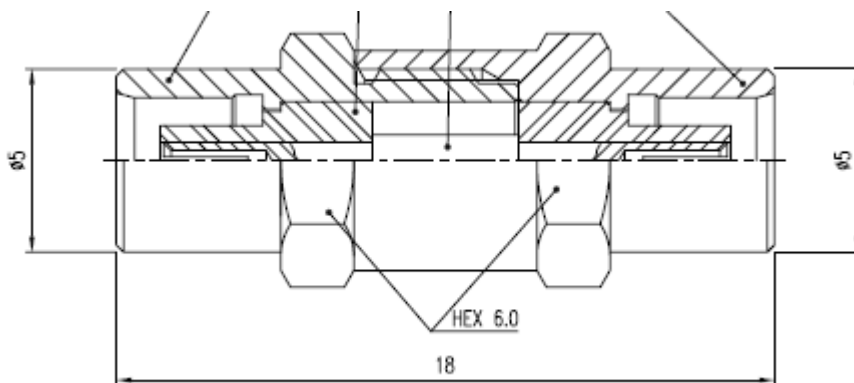

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com