



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.IS.N18mf

In Series – N male to N female

| Frequency  | Insertion Loss                              | Impedance | VSWR       |
|------------|---------------------------------------------|-----------|------------|
| DC – 18GHz | $0.07 f^{1/2}$ dB<br><i>f=frequency GHz</i> | 50ohms    | 1.20:1 max |

### Notes:

- Material:  
Body: SUS303/passivate  
Socket Contacts: BeCu/gold  
Dielectric: PEI
- Operation temperature: -65C to +105C deg

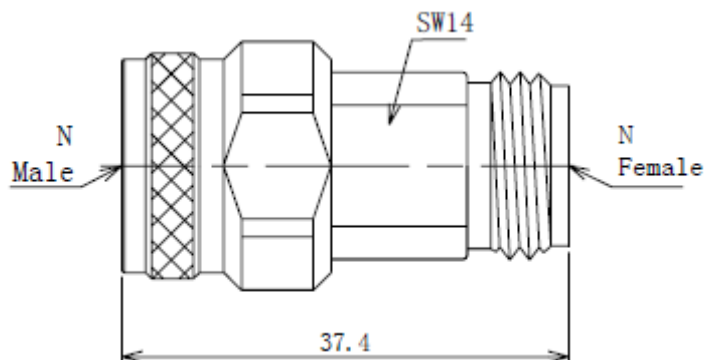

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)