



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.N18mf4HF

In Series – N male/female 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.06 f $\frac{1}{2}$ dB <i>f=frequency GHz</i>	50ohms	1.15:1 max

Notes:

- Material:
Body: SUS303/passivated & polished
Socket Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -60C to +165C deg
- Durability: 2000 mating cycles

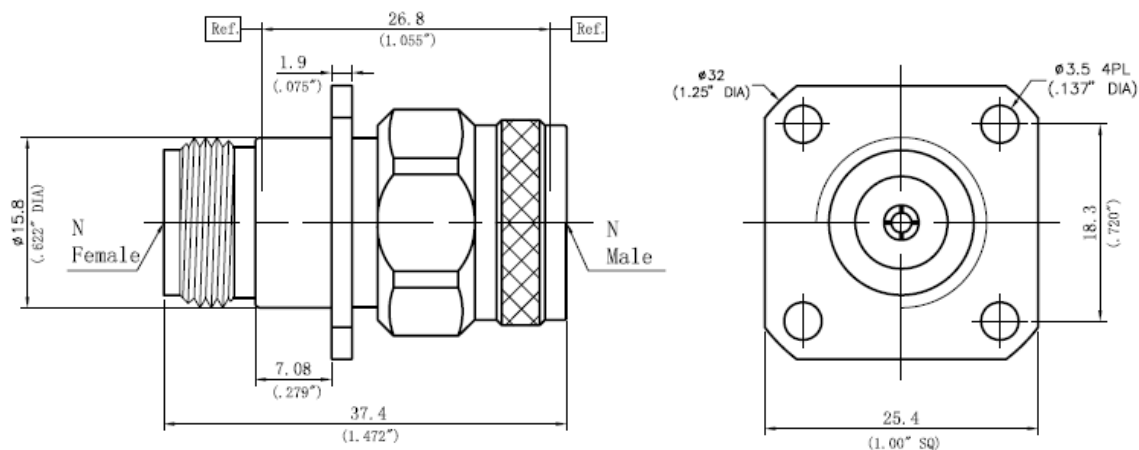

ALL SPECIFICATIONS SUBJECT TO CHANGE

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com