



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.NNPfm

In Series – N male Push-on N/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.15:1 max

Notes:

- Material:
Body: SUS303 Stainless Steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65°C to +105°C

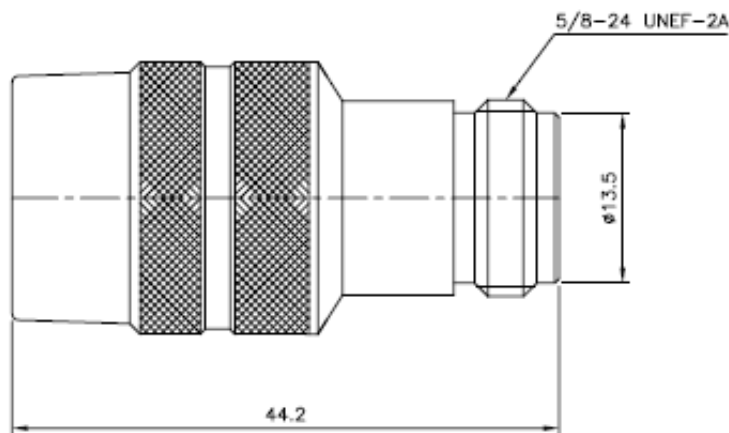

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com