



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.Nff4HF

In Series – N female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 11GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	1.20:1 max

Notes:

- Material:
Body: brass/nickel
Socket Contacts: BeCu/gold
- Operation temperature: -65°C to +105°C
- Interface: N per MIL-C-39012 & IEC169-15

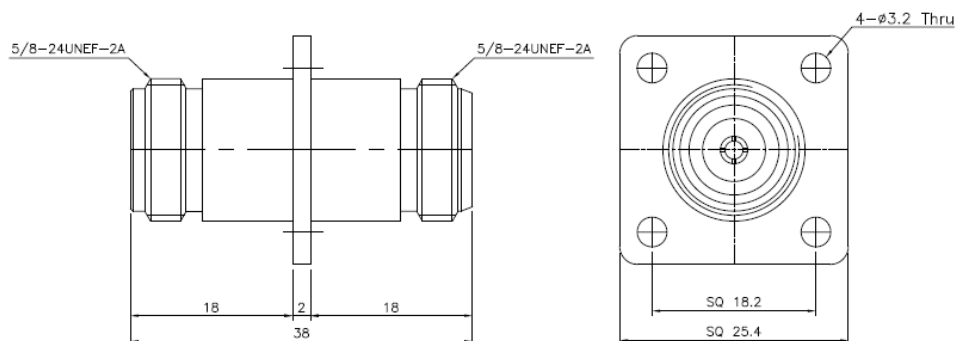

Dimensions in mm. Specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com