



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.NffBH

In Series – N female/female Bulkhead

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	0.12dB MIN	50ohms	1.20:1 MAX

Notes:

- Material:
Body: brass/nickel
Socket Contacts: BeCu/gold
- Operation temperature: -65C to +105C deg
- Interface: N per MIL-C-39012 & IEC169-15

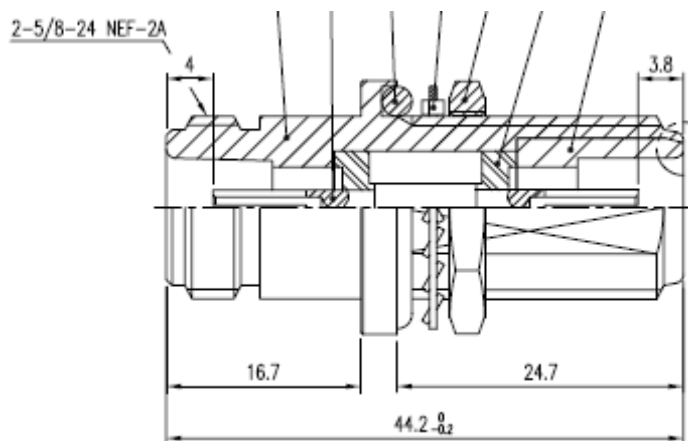

ALL SPECIFICATIONS SUBJECT TO CHANGE

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com