



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.Nmm

In Series – N male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 6GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	$1.05 + 0.005 f$ (GHz)

Notes:

- Material:
Body: brass/nickel
Socket Contacts: BeCu/gold
- Operation temperature: -65°C to +105°C
- Interface: N per MIL-C-39012 & IEC169-15

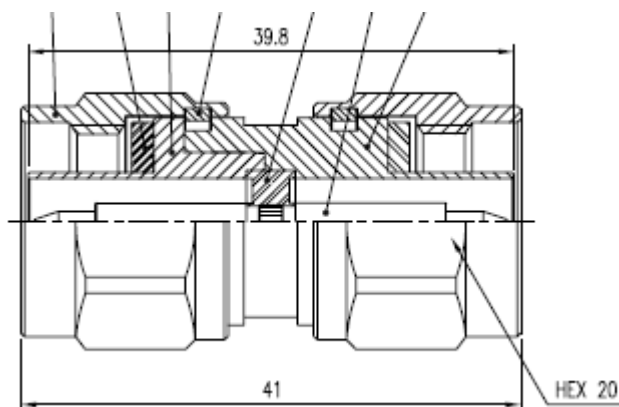

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com