



94 Jackson Road, Devens, MA 01434-4012 USA

ADAPTORS


Model RMAD.BS.SMARPSMAmm

Between Series – SMA to RPSMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 8GHz	0.6dB typ	50ohms	1.5:1 max

Notes:

- a. Operation temperature: -55C to +85C deg
- b. *RoHS Complaint*

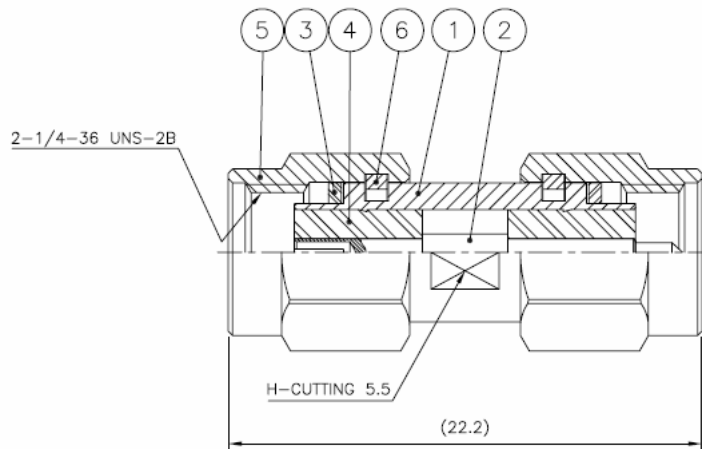

Item	Description	Material	Plating
1	Body**	Brass	Gold
2	Contact	BeCU	Gold
3	Gasket	Silicone	N/A
4	Insulator	Teflon	N/A
5	Coupling Nut	Brass**	Gold
6	Spring Ring	Stainless Steel	Passivate

**May also be stainless/passivate

Dimensions in mm. All specifications are subject to change without notice.