



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMA27ff4HF

In Series – SMA f/f 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.035 f ½ dB	50Ω	1.15:1 max

Notes:

- Material:
Body: SUS303/passivated
Socket Contacts: BeCu/gold
- Operation temperature: -60°C to +165°C
- Interface: SMA per MIL-STD-348A
- Durability: 500 mating cycles

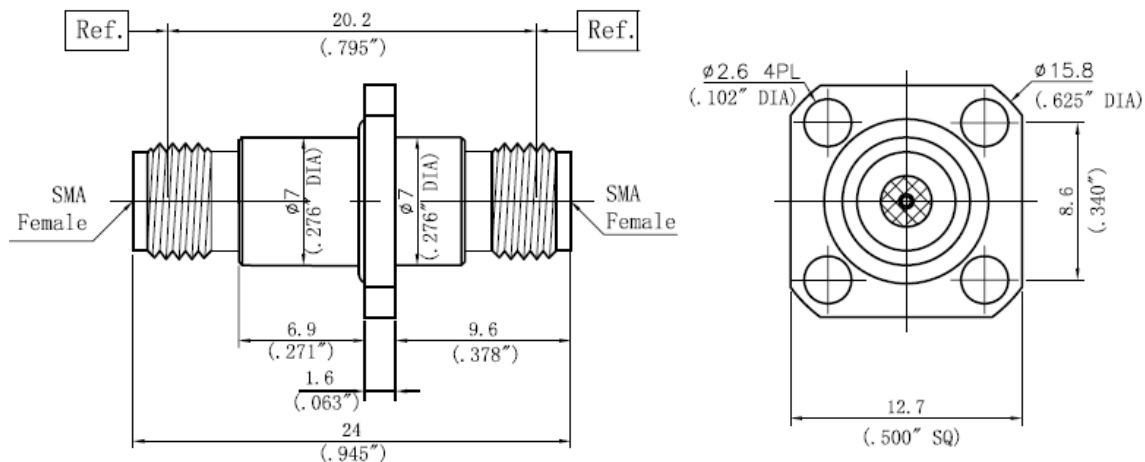

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com