



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMASMAPfmF

In Series – SMA Quick Connect

Frequency	Insertion Loss	Impedance	VSWR
DC – 27GHz	0.035 f $\frac{1}{2}$ dB <i>f=frequency GHz</i>	50ohms	DC-18Ghz - 1.18:1 max 18-27GHz – 1.25:1 max

Notes:

- Material:
Body: SUS303/passivated
Socket Contacts: BeCu/gold
- Operation temperature: -60C to +165C deg
- Interface: SMA per MIL-STD-348A
- Durability: 500 mating cycles

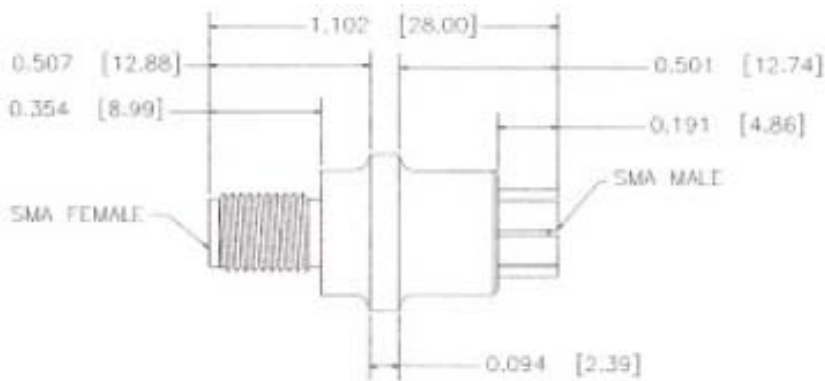

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com