



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAff

In Series – SMA female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50Ω	$1.05 + 0.005 f$ (GHz)

Notes:

- Material:
Body: stainless steel/passivate
Socket Contacts: BeCu/gold
- Operation temperature: -65°C to +105°C
- Interface: SMA per MIL-C-83517 & IEC169-15

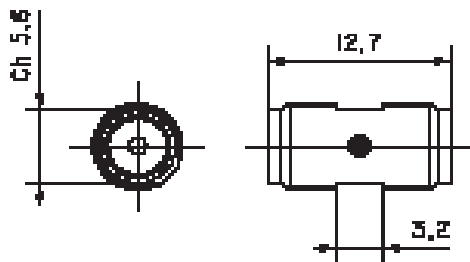

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com