



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAff4HF

In Series – SMA female/female 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.02 dB max	50 Ω	1.25:1 max

Notes:

- Material:
Body: SS/P
Socket Contacts: BeCu/gold
- Operation temperature: -65°C to +105°C
- Interface: N per MIL-C-39012 & IEC169-15

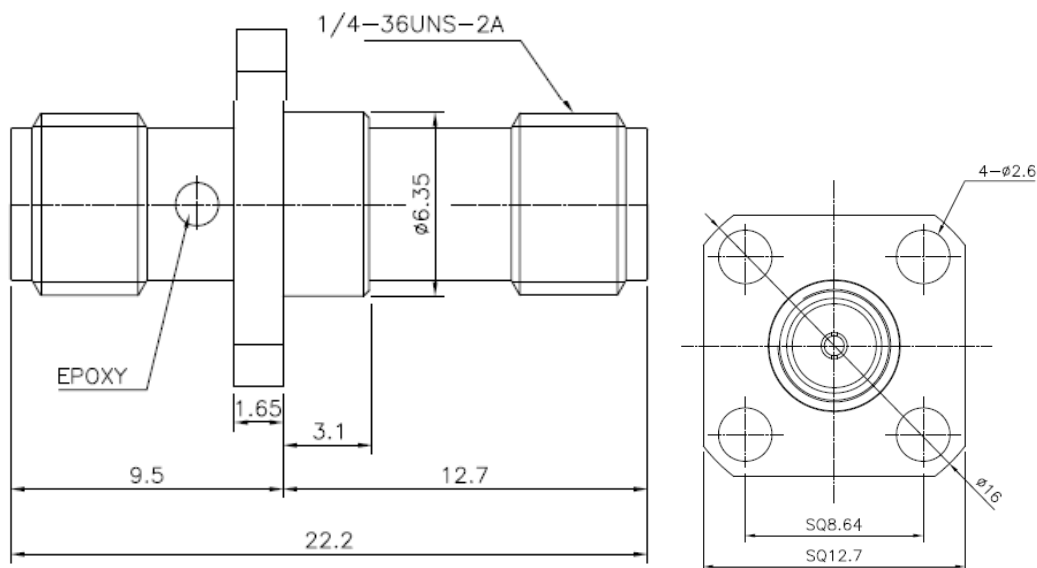

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com