



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.IS.SMAff4HFa In Series – SMA female/female 4HF

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.02 dB max	50Ω	1.25:1 max

Notes:

- Material:**
 Body: SS/P
 Socket Contacts: BeCu/gold
 O-ring: silicone rubber
- Operation temperature:** -65°C to +105°C
- Interface:** N per MIL-C-39012 & IEC169-15

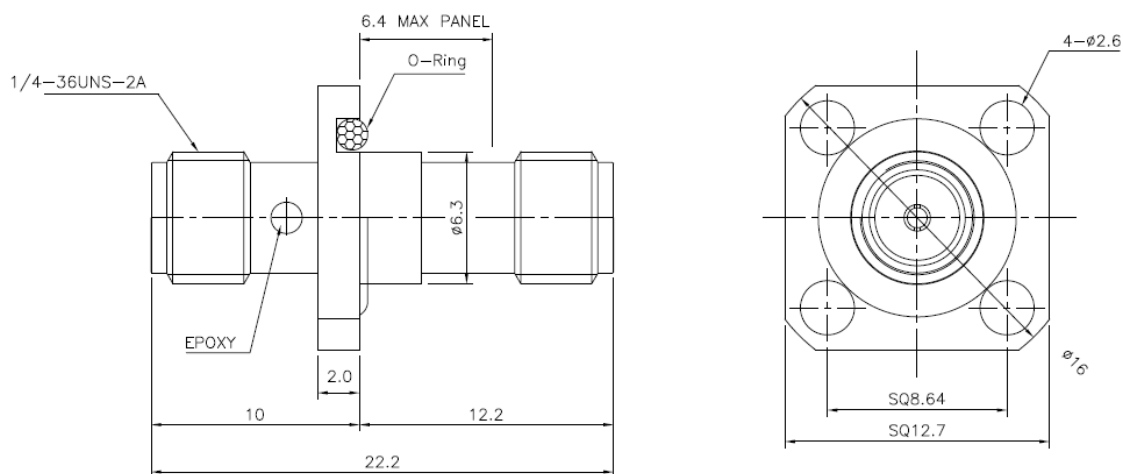

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com