



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAffBH

In Series – SMA female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.25:1 max

Notes:

- Material:
Body: stainless steel/passivate
Socket Contacts: BeCu/gold
- Operation temperature: -65°C to +105°C
- Interface: SMA per MIL-C-83517 & IEC169-15

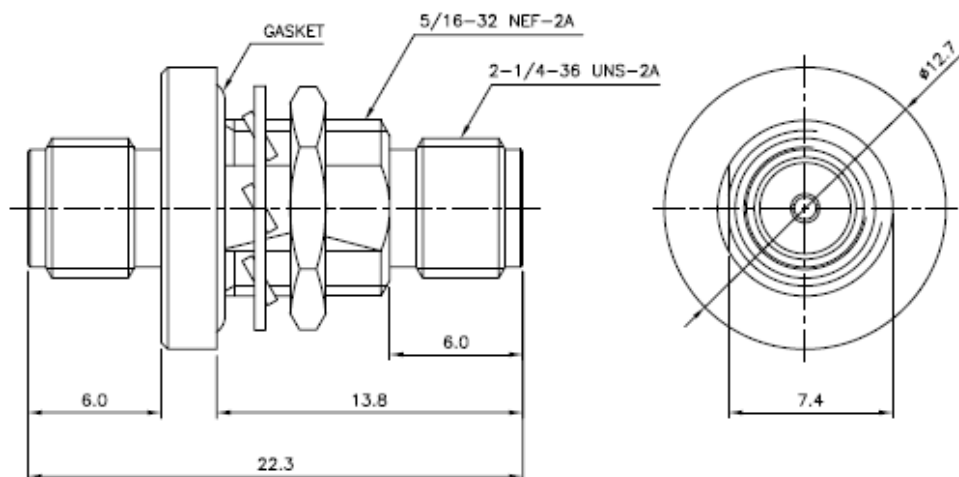

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com