



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAffBHc

In Series – SMA female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 8GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50ohms	1.20:1 max

Notes:

- Material:
Body: brass/gold
Contacts: BeCu/gold
Dielectric: Teflon
- Operation temperature: -35C to +85C deg

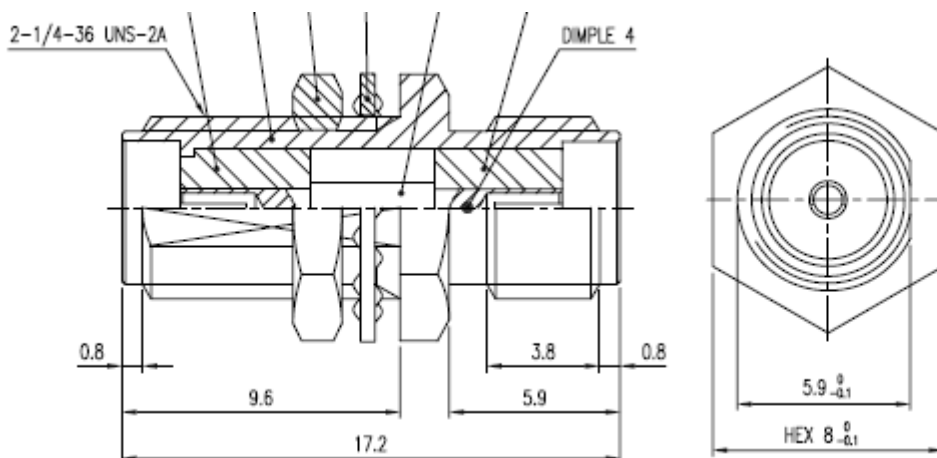

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com