



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAmf

In Series – SMA male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	$0.05\sqrt{f(\text{GHz})}\text{dB}$	50Ω	1.20:1 max

Notes:

- Operation temperature: -65°C to +125°C
- Interface: SMA per MIL-C-83517 & IEC169-15

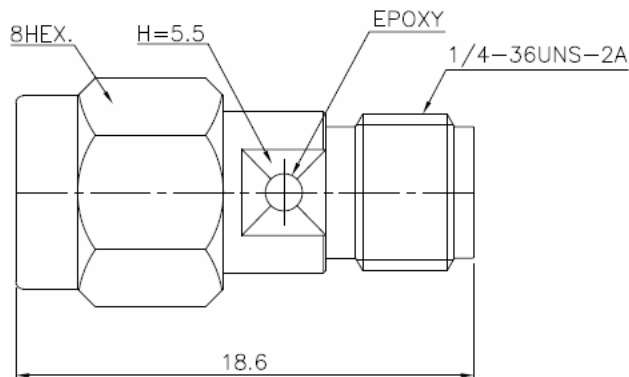

Item	Description	Material	Plating
1	Body	Stainless steel	Passivate
2	Contact	BeCU	Gold
3	Gasket	Silicone	N/A
4	Insulator	Teflon	N/A
5	Coupling Nut	Stainless Steel	Passivate
6	Spring Ring	Stainless Steel	Passivate

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com