



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMAmfRA

In Series – SMA R/A male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dB max	50 Ω	1.30max

Notes:

- Material:**
Body: brass/gold
Socket Contacts: BeCu/gold
- Operation temperature:** -60°C to +165°C
- Interface:** SMA per MIL-STD-348A
- Durability:** 500 mating cycles

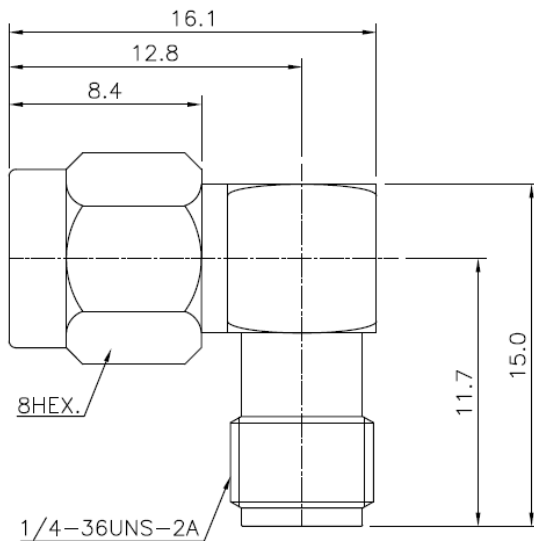

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com