



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

COAXIAL CONNECTOR SERIES ADAPTORS


Model RMAD.IS.SMAmFRag

In Series – SMA R/A male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dB max	50Ω	1.25:1 max

Notes:

- Material:**
Body: Brass/gold
Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature:** -55°C to +85°C
- Interface:** SMA per MIL-STD-348A
- Power:** 1 W CW
- For Telecom specific applications**

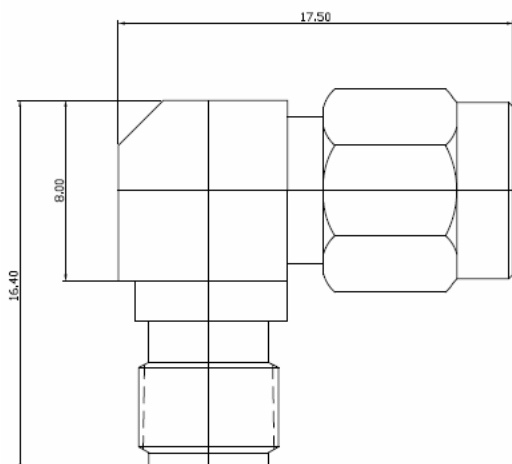

Dimensions in mm. All specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com