



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In Series


Model RMAD.IS.SMAmfSRA

SMA Swept R/A

Frequency	Insertion Loss	Impedance	VSWR
DC-18GHz	0.65 dB max	50 Ω	1.35 :1 max

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -65°C to +125°C
- Marked with date code

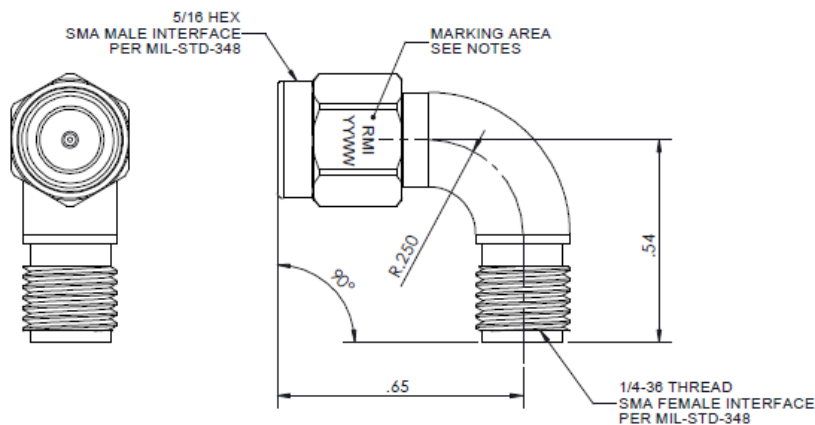

Dimensions in inches. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com