94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

Model RMAD.IS.SMAmmRAa In Series – SMA R/A male/male

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.5dBmax	50Ω	1.2:1 max

Notes:

a. **Material:**
   Coupling nut: Stainless/passivate
   Body: Brass/nickel
   Socket Contacts: BeCu/gold
b. **Operation temperature: -60°C to +165°C**
c. **Interface: SMA per MIL-STD-348A**
d. **Durability: 500 mating cycles**

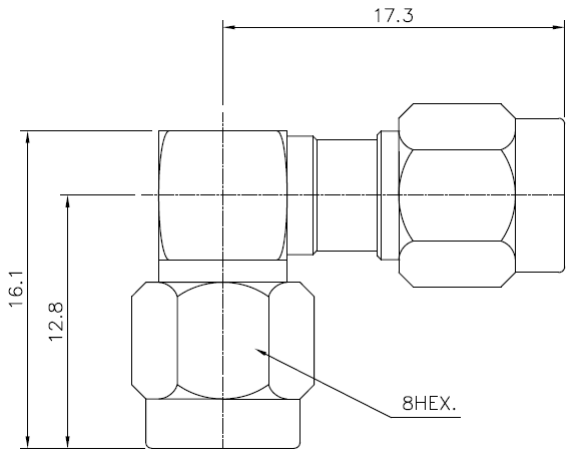

Dimensions in mm. ALLSPECIFICATIONS SUBJECT TO CHANGE

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com