



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS

In Series


Model RMAD.IS.SMAmmsRA

SMA Swept R/A

Frequency	Insertion Loss	Impedance	VSWR
DC-18GHz	0.65 dB max	50Ω	1.20:1 max

Notes:

- a. Material:
 - Body: SUS303 stainless steel/passivate
 - Socket Contacts: BeCu/gold
 - Dielectric: PTFE
- b. Operation temperature: -65°C to +125°C

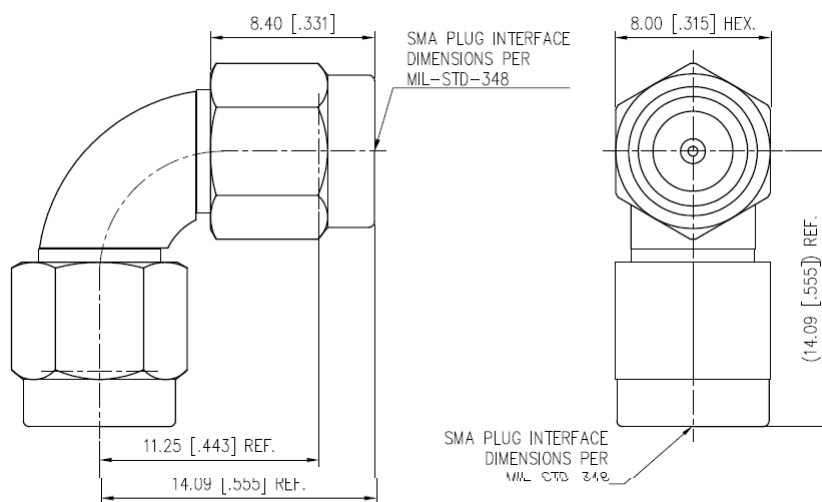

Dimensions in mm (inches). All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com