



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.IS.SMBffBH In Series – SMB female/female, BH

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.07 f ½ dB <i>f=frequency GHz</i>	50Ω	1.15:1

Notes:

- a. Material:
 - Body: brass/gold
 - Socket Contacts: BeCu/gold
 - Spring Ring: BeCu/gold
 - Insulator: PTFE
- b. Operation temperature: -45°C to +125°C

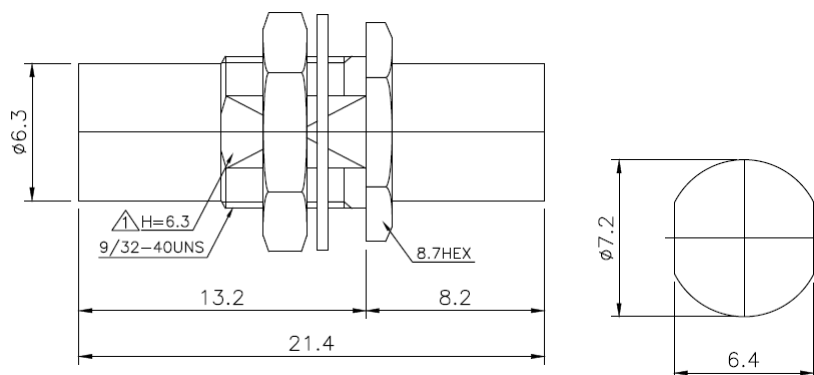

All specifications subject to change. Dimensions in millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com