



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMBmf

In Series – SMB male/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	$0.07 f^{1/2}$ dB <i>f=frequency GHz</i>	50ohms	1.15:1

Notes:

- Material:
Body: brass/gold
Socket Contacts: BeCu/gold
Spring Ring: BeCu/gold
Insulator: PTFE
- Operation temperature: -65C to +85C deg

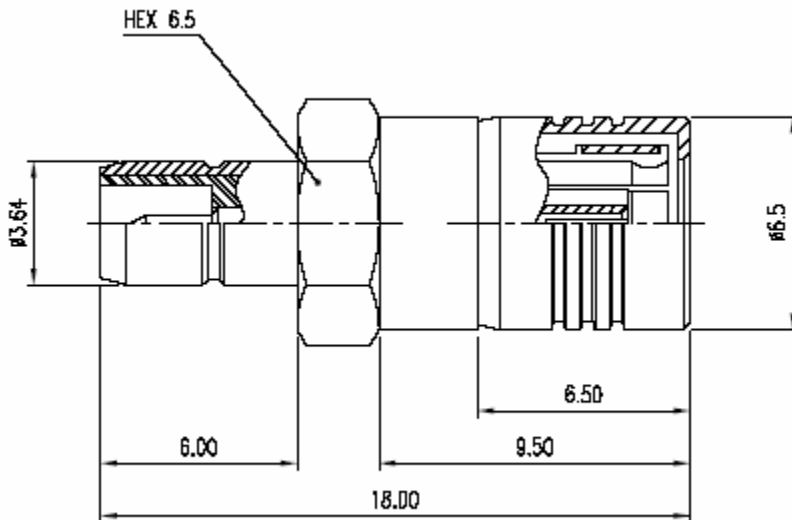

All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com