



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SMBmmBH

In Series – SMB male/male, BH

Frequency	Insertion Loss	Impedance	VSWR
DC – 4GHz	0.07 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.15:1

Notes:

- a. **Material:**
 Body: brass/gold
 Socket Contacts: BeCu/gold
 Spring Ring: BeCu/gold
 Insulator: PTFE
- b. **Operation temperature:** -45°C to +125°C

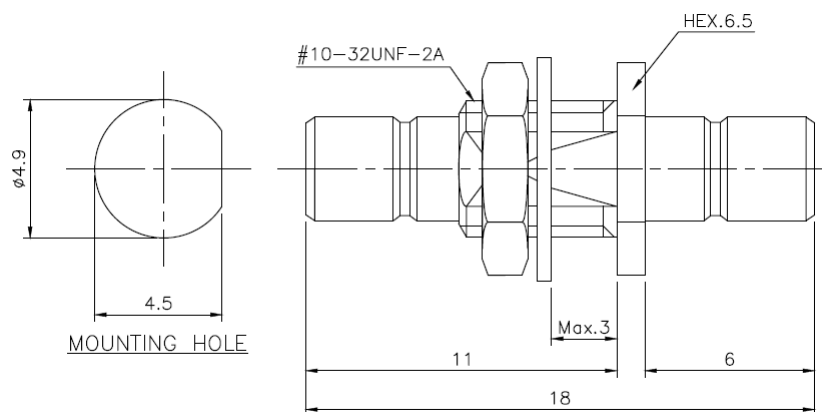

All specifications subject to change. Dimensions in millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com