



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS - In Series


Model RMAD.IS.SMPff

SMP female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	$0.06 f^{1/2}$ dB <i>f=frequency GHz</i>	50 Ω	1.35:1 max

Notes:

- Material:
Body: brass/gold
Socket Contacts: BeCu/gold
Dielectric: PTFE
- Operation temperature: -40°C to +125°C
- Durability: 1000 mating cycles

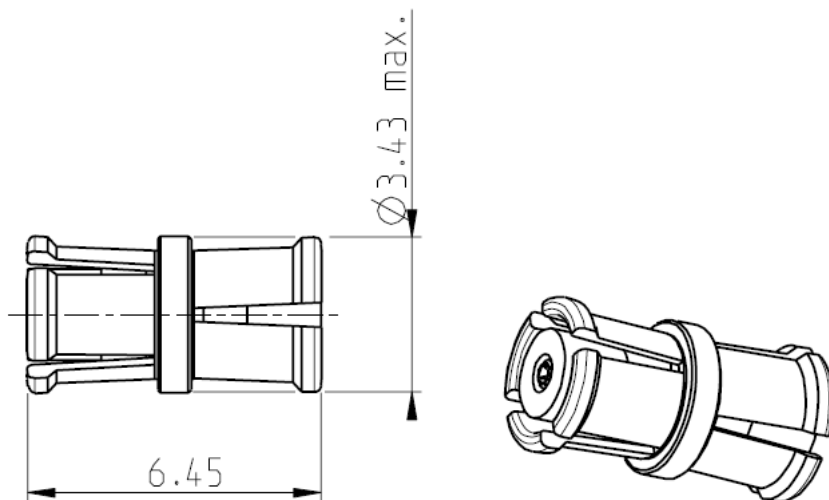

DIMENSIONS IN mm. ALL SPECIFICATIONS SUBJECT TO CHANGE

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com