



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.SSMA40mf

In Series – SSMA

Frequency	Insertion Loss	Impedance	VSWR
DC – 40GHz	0.035 f $\frac{1}{2}$ dB <i>f=frequency GHz</i>	50 Ω	1.20:1 max

Notes:

- a. Material:
Body: SUS303F/passivated
Socket Contacts: BeCu/gold
- b. Operation temperature: -60°C to +165°C

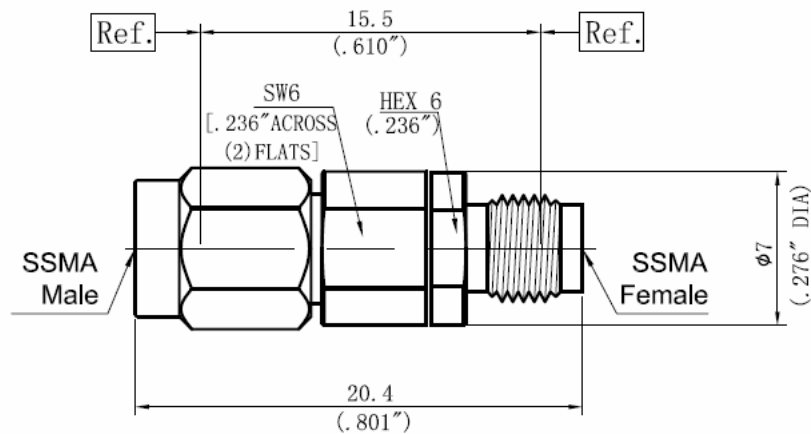

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com