



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS - In Series

Model RMAD.IS.TNC18ff4HF

TNC female/female, 4-hole Flange

Frequency	Insertion Loss	Impedance	VSWR
DC – 18GHz	0.06 f ¹ / ₂ dB <i>f=frequency GHz</i>	50Ω	1.25:1 max

Notes:


a. Material:

Body: SUS303/passivated & polished

Socket Contacts: BeCu/gold

Dielectric: PTFE

b. Operation temperature: -60°C to +165°C

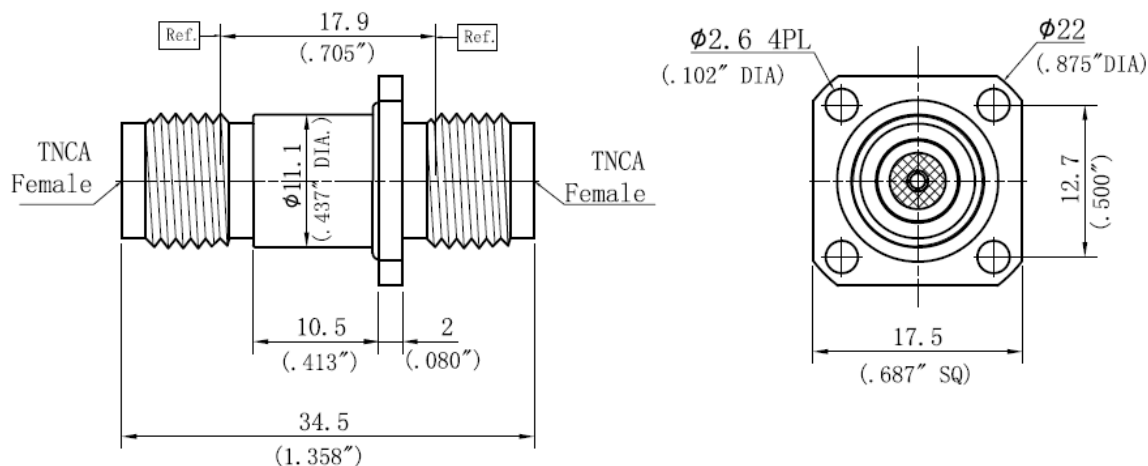

DIMENSIONS IN mm. ALL SPECIFICATIONS SUBJECT TO CHANGE

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com