



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS - In Series


Model RMAD.IS.TNCff

TNC female/female

Frequency	Insertion Loss	Impedance	VSWR
DC – 5GHz	$0.08 f^{1/2}$ dB <i>f=frequency GHz</i>	50 Ω	1.25:1 max

Notes:

- a. Material:
Body: Brass/nickel
Socket Contacts: BeCu/gold
Dielectric: PTFE
- b. Operation temperature: -35°C to +85°C

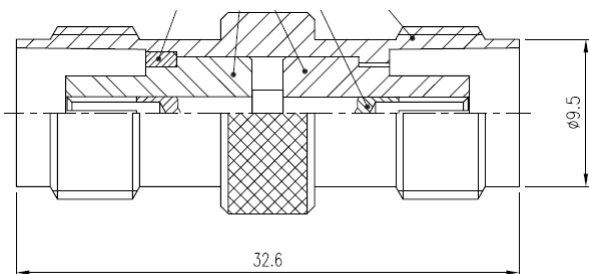

Dimensions in mm. Specifications subject to change.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com