



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.50000.24mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-50	1-10 +/-1.5 20 & 30 +/- 2.0	50Ω	1.65:1	1 watt

Notes:

- Weight: 5grams
- Connector: 2.4mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N
- Length (L): 0-20dB = 0.871 +/- 0.30", 30dB = 0.911 +/- 0.30"

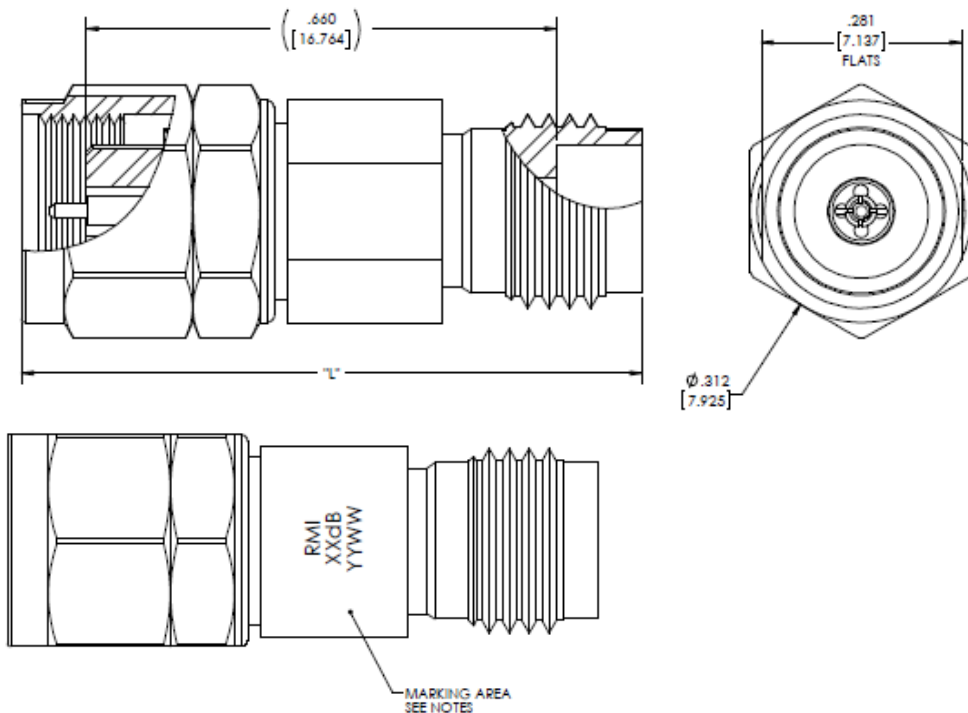

All specifications are subject to change without notice.

Dimensions: inches (mm)

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 2/4/09