



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMatxx.18000SMAmfa

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (typ)	Power (max)
DC-18	1-6 +/-0.4 7-10 +/- 0.5 11-20 +/- 0.8 21-30 +/-1.0	50Ω	1.30:1	2watts

Notes:

- a. Weight: 5grams
- b. Connector: SMA male/female
- c. Operation temperature: -55°C to +125°C
- d. Case material: Stainless Steel/ passivate
- e. Insert desired attenuation value at "xx" in P/N
- f. *RoHS Compliant Hardware*

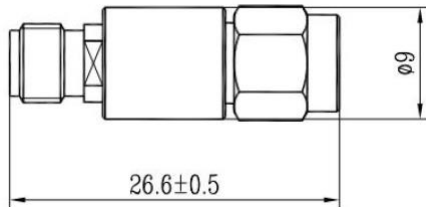

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 11/1/13